



**GERDAU**  
Shape the future

Environmental Product Declaration  
Gerdau Rebar, Whitby Steel Mill



**Declaration Owner**

Gerdau Long Steel North America  
Whitby Steel Mill  
1 Gerdau Court  
Whitby, ON L1N 5T1, Canada  
www.gerdau.com | GLNinfo@gerdau.com

**Product:**

Fabricated Reinforcing Bar

**Declared Unit**

The declared unit is one ton of fabricated reinforcing bar produced at the Whitby, ON steel mill

**EPD Number and Period of Validity**

SCS-EPD-07290  
EPD Valid August 30, 2021 through August 29, 2026  
Version: September 8, 2021

**Product Category Rule**



PCR Guidance for Version 3.2. UL Environment. Sept. 2018

PCR Guidance for Building-Related Products and Services. Part B: Designated Steel Construction Product EPD Requirements. UL Environment. V.2. August 2020.

**Program Operator**

SCS Global Services  
2000 Powell Street, Ste. 600, Emeryville, CA 94608  
+1.510.452.8000 | www.SCSglobalServices.com



Declaration owner:	Gerdau Long Steel North America
Address:	1 Gerdau Court, Whitby, ON L1N 5T1, Canada
Declaration Number:	SCS-EPD-07290
Declaration Validity Period:	EPD Valid August 30, 2021 through August 29, 2026
Version date:	September 8, 2021
Program Operator:	SCS Global Services
Declaration URL Link:	https://www.scsglobalservices.com/certified-green-products-guide
LCA Practitioner:	Tess Garvey, Ph.D., SCS Global Services
LCA Software and LCI database:	OpenLCA 1.10 software and the Ecoinvent v3.7 database
Product's Intended Application:	Fabricated reinforcing bar for use in concrete structures
Product RSL:	n/a
Markets of Applicability:	Global
EPD Type:	Product-Specific
EPD Scope:	Cradle-to-Gate
LCIA Method and Version:	CML-IA and TRACI 2.1
Independent critical review of the LCA and data, according to ISO 14044 and ISO 14071	<input type="checkbox"/> internal <input checked="" type="checkbox"/> external
LCA Reviewer:	 Thomas Gloria, Ph.D., Industrial Ecology Consultants
Part A Product Category Rule:	PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 3.2. UL Environment. Sept. 2018
Part A PCR Review conducted by:	Lindita Bushi, PhD (Chair); Hugues Imbeault-Tétreault, ing., M.Sc.A.; Jack Geibig
Part B Product Category Rule:	PCR Guidance for Building-Related Products and Services. Part B: Designated Steel Construction Product EPD Requirements. UL Environment. V.2. August 2020.
Part B PCR Review conducted by:	Thomas Gloria, PhD; Brandie Sebastian, James Littlefield
Independent verification of the declaration and data, according to ISO 14025 and the PCR	<input type="checkbox"/> internal <input checked="" type="checkbox"/> external
EPD Verifier:	 Thomas Gloria, Ph.D., Industrial Ecology Consultants
Declaration Contents:	1. Gerdau NA..... 2 2. Products..... 2 3. LCA: Calculation Rules..... 4 4. LCA: Scenarios and Additional Technical Information ..... 9 5. LCA: Results..... 10 6. LCA: Interpretation ..... 13 7. References..... 13

**Disclaimers:** This EPD conforms to ISO 14025, 14040, 14044, and ISO 21930.

**Scope of Results Reported:** The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.

**Accuracy of Results:** Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.

**Comparability:** The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

In accordance with ISO 21930:2017, EPDs are comparable only if they comply with the core PCR, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.

Comparison of the environmental performance of construction works and construction products using EPD information shall be based on the product's use and impacts at the construction works level. In general, EPDs may not be used for comparability purposes when not considered in a construction works context. Given this PCR ensures products meet the same functional requirements, comparability is permissible provided the information given for such comparison is transparent and the limitations of comparability explained."

When comparing EPDs created using this PCR, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to different results for upstream or downstream of the life cycle stages declared.

# 1. Gerdau Long Steel North America

## Gerdau Company Profile

Gerdau is a leading producer of long steel in the Americas and one of the largest suppliers of special steel in the world. It is the largest recycler in Latin America and one of the largest recyclers in North America, transforming millions of tons of scrap into steel each year and reinforcing its commitment to sustainable development in the regions where it operates.

Gerdau's North American business division focus on long steel and special steel products including beams and piling, merchant bar quality, rebar, and special bar quality products. The company serves the construction, automotive, agricultural, service center and energy markets through its vertically integrated network of steel mills and metals recycling facilities.

## 2. Products

### 2.1 PRODUCT DESCRIPTION

Gerdau is one of the leading producers of rebar – concrete reinforcing steel – providing an impressive range of straight bars and dowel products. Rebar is used in bridges, buildings, skyscrapers, homes, warehouses, foundations and roads to increase the strength of the concrete and to serve as the skeleton of the structure. These products have been used in projects ranging from the new NY Bridge, replacing the Tappan Zee Bridge, to the World Trade Center, and from hotels on the East Coast to professional stadiums on the West Coast.

With Gerdau's Hot-Rolled Rebar, rolled from continuous cast billets, customers have the ability to choose the products best meeting their construction requirements, from dowel bars and mine anchor bolts, to straight rebar.

Gerdau rebar is manufactured from recycled steel, demonstrating the company's commitment to environmentally-responsible steel production.

This Environmental Product Declaration is for 1 metric ton of fabricated Carbon Steel Rebar produced by Gerdau in Whitby, North Carolina. Carbon Steel Rebar is manufactured from steel scrap, melted in an Electric Arc Furnace (EAF) followed by hot rolling, and by transport to Gerdau fabrication shops and fabrication.

This EPD is for Carbon Steel Rebar that is obtained from steel scrap that does not contain virgin material. Scrap metal, together with alloying additions, are melted in an Electric Arc Furnace (EAF) to obtain liquid steel and casted into steel billets. The billets are sent to the rolling mill where they are rolled and shaped to the required dimensions for the finished bars and coils of rebar. The Carbon Steel Rebar is then fabricated in independent fabrication shops or shipped directly to projects without fabrication.

This EPD includes rebar produced in the Gerdau mill located in Whitby, ON.

## 2.2 PRODUCT FLOW DIAGRAM

A flow diagram illustrating the production processes and life cycle phases included in the scope of the EPD is provided below.

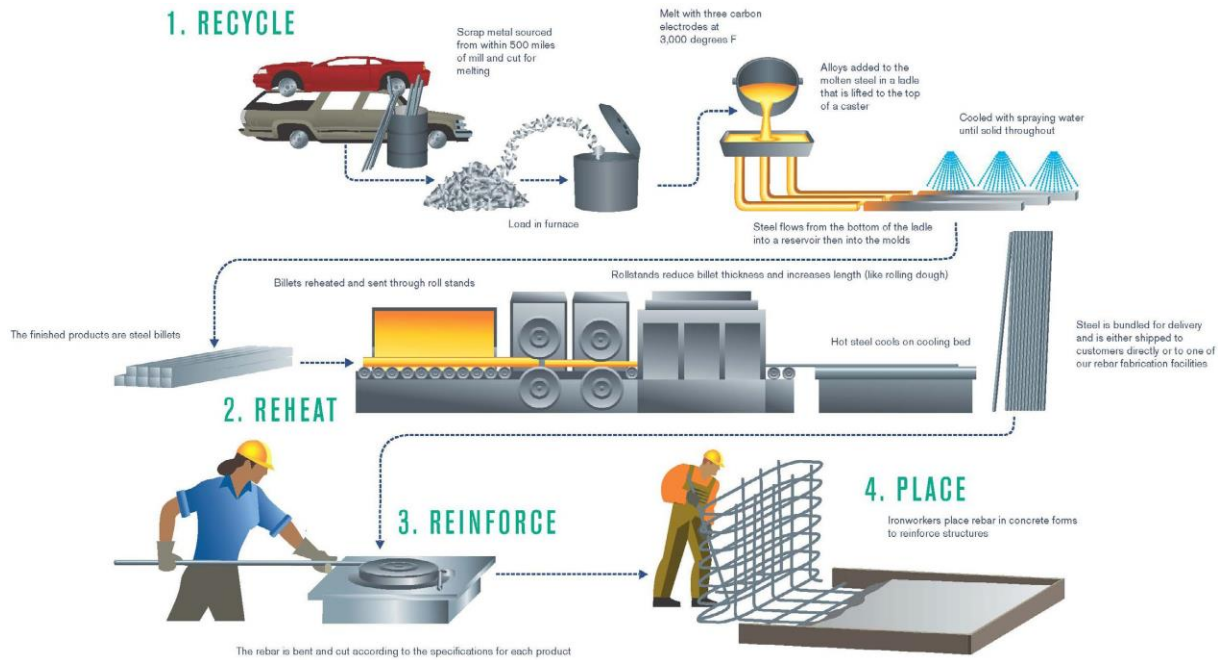


Figure 1. Flow Diagram for the life cycle of the Gerdau rebar.

## 2.4 DECLARATION OF METHODOLOGICAL FRAMEWORK

The scope of the EPD is cradle-to-gate, including raw material extraction and processing, transportation, steel manufacture and rolling. The life cycle phases included in the product system boundary are shown below.

Table 1. Life cycle phases included in the Gerdau reinforcing bar product system boundary.

Product			Construction Process		Use							End-of-life				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	B1	B1	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw material extraction and processing	Transport to manufacturer	Manufacturing	Transport	Construction - installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, recovery and/or recycling potential
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

X = Module Included | MND = Module Not Declared

Cut-off and allocation procedures are described below and conform to the PCR and ISO standards.

## 2.5 TECHNICAL DATA

Technical specifications for the reinforcing bar in this study include ASTM A615 and ASTM A706.

## 2.6 INTENDED APPLICATION

The intended application of the reinforcing bar is for use in concrete structures to provide support.

## 2.7 MATERIAL COMPOSITION

The approximate material content of carbon steel rebar will vary slightly from batch to batch. In general, the steel will contain < 97% recycled iron, < 2% Manganese, <1.5% Copper, <0.9% Carbon, and a total of 1.5% or less of Nickel, Silicon, Sulfur, Tin, Phosphorus, and Vanadium. Steel products used inside the building envelope (e.g., used in load-bearing applications present inside wall structures) do not include materials or substances which have any potential route of exposure to humans or flora/fauna in the environment.

## 2.8 PROPERTIES OF DECLARED PRODUCT AS DELIVERED

The reinforcing bar can be fabricated by a fabricator or shipped directly to a job site.

## 2.9 MANUFACTURING


The rebar in this study is manufactured at the Whitby, ON facility.

## 2.10 PACKAGING

Rebar does not require packaging, and none is modeled in the present study.

## 2.11 FURTHER INFORMATION

Further information on the product can be found on the manufacturers' website at [www.gerdau.com](http://www.gerdau.com)

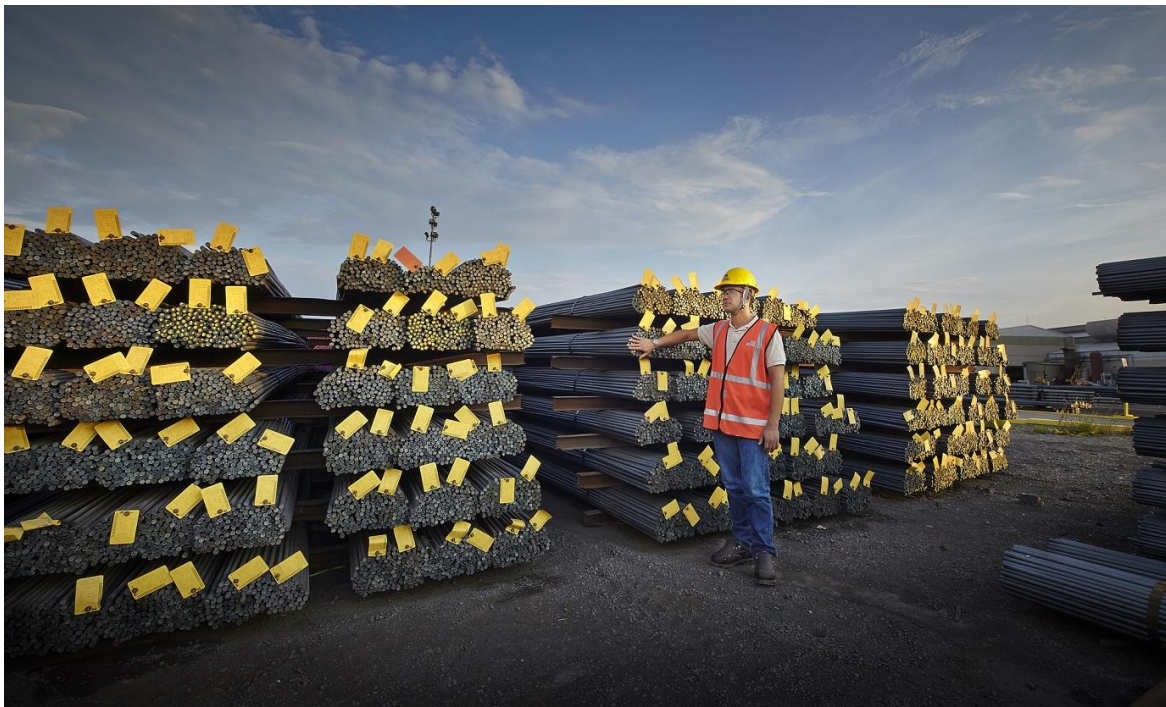

### 3. LCA: Calculation Rules

#### 3.1 DECLARED UNIT

The declared unit used in the study is defined as one (1) metric ton of fabricated rebar, consistent with the PCR.

**Table 2.** *The modules and unit processes included in the scope for the Gerdau rebar.*

Module	Module Description	Unit Processes Included in Scope
A1	Extraction and processing of raw materials; any reuse of products or materials from previous product systems; processing of secondary materials; generation of electricity from primary energy resources; energy, or other, recovery processes from secondary fuels	Raw material extraction and processing, including all activities necessary for the reprocessing steel scrap, including but not limited to the recovery or extraction and processing of feedstock materials
A2	Transport (to the fabricator)	Transportation from primary production facility in Whitby, ON to offsite fabricator
A3	Concrete reinforcing bar fabrication	Concrete reinforcing bar fabrication including cutting bending and threading bars per customers' request
A4	Transport (to the building site)	Module Not Declared
A5	Construction-installation process	Module Not Declared
B1	Product use	Module Not Declared
B2	Product maintenance	Module Not Declared
B3	Product repair	Module Not Declared
B4	Product replacement	Module Not Declared
B5	Product refurbishment	Module Not Declared
B6	Operational energy use by technical building systems	Module Not Declared
B7	Operational water uses by technical building systems	Module Not Declared
C1	Deconstruction, demolition	Module Not Declared
C2	Transport (to waste processing)	Module Not Declared
C3	Waste processing for reuse, recovery and/or recycling	Module Not Declared
C4	Disposal	Module Not Declared
D	Reuse-recovery-recycling potential	Module Not Declared

#### 3.4 UNITS

All data and results are presented using SI units.

### 3.5 ESTIMATES AND ASSUMPTIONS

- Representative inventory data were used to reflect the energy mix for electricity use. Supply mixes were modeled based on the ecoinvent dataset CA-ON, representing the Ontario, Canada province.
- Where necessary, the production of steel was modeled with unit process data taken from Ecoinvent 3.7.1. The datasets utilized for steel production are provided in Section 4.4
- Impacts for recycling EAF baghouse dust are modeled using the energy required to recycle zinc from the melting of steel scrap, based on Narita et al. 1999.
- Primary data for resource use (e.g., electricity, natural gas, water), waste/co-products, and emissions released, are allocated on a mass-basis to rebar and co-products (e.g. EAF dust, slag, baghouse dust and millscale).
- Representative inventory data for raw materials and ancillary materials were modeled with unit process data taken from Ecoinvent.
- Disposal of manufacturing waste where unknown is modeled based for solid and hazardous waste generation and disposal in the United States, as specified in the PCR. Specifically, 80% of non-hazardous wastes are disposed in landfill and 20% incinerated. Transportation for end-of-life scenarios was modeled using the EPA WARM model assumption of 20 miles (~32 km), from the point of product use to a landfill, material recovery center, or waste incinerator. Ecoinvent datasets are used to model the impacts associated with incineration and landfilling, which does not include energy recovery from landfill gas.
- Primary data of material components (e.g., alloys, refractory materials) could not be modeled with actual process information, and representative data from the ecoinvent database were used to represent the alloy materials. Additionally, A2 and A3 were modeled with representative secondary data, but may vary considerably for a specific product.

The PCR requires the results for several inventory flows related to construction products to be reported including energy and resource use and waste and outflows. These are aggregated inventory flows, and do not characterize any potential impact; results should be interpreted considering this limitation.

### 3.6 CUT-OFF RULES

According to the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No data gaps were allowed which were expected to significantly affect the outcome of the indicator results. No known flows are deliberately excluded from this EPD.

### 3.7 DATA SOURCES

Primary data were provided by Gerdau for their manufacturing facility. The sources of secondary LCI data are the Ecoinvent database, as well as the US LCI database.

**Table 3.** Data sources for the Gerdau rebar.

Flow	Dataset	Data Source	Publication Date
<b>Raw Materials and Consumables</b>			
Ferrochrome	ferrochromium production, high carbon, 55% Cr   ferrochromium, high carbon, 55% Cr   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Ferromanganese,	ferromanganese production, high-coal, 74.5% Mn   ferromanganese, high-coal, 74.5% Mn   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Ferro silicon	market for ferrosilicon   ferrosilicon   Cutoff, U - GLO,	Ecoinvent 3.7.1	2020
Silicomanganese	market for ferrosilicon   ferrosilicon   Cutoff, U - GLO, ferromanganese production, high-coal, 74.5% Mn   ferromanganese, high-coal, 74.5% Mn   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Calcium carbide	calcium carbide production, technical grade   calcium carbide, technical grade   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Olivine sand	market for magnesium oxide   magnesium oxide   Cutoff, U - GLO market for silica sand   silica sand   Cutoff, U - GLO	Ecoinvent 3.7.1	2020
Fluorspar	fluorspar production, 97% purity   fluorspar, 97% purity   Cutoff, U - GLO	Ecoinvent 3.7.1	2020
Refractory	refractory production, basic, packed   refractory, basic, packed   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Electrodes	market for graphite   graphite   Cutoff, U - GLO	Ecoinvent 3.7.1	2020
Coke products	market for petroleum coke   petroleum coke   Cutoff, U - GLO, market for hard coal   hard coal   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Lime products	market for quicklime, milled, loose   quicklime, milled, loose   Cutoff, U - RoW, lime production, milled, loose   lime   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Dolomite	dolomite production   dolomite   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Lubricant	lubricating oil production   lubricating oil   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
Oxygen, nitrogen, argon	Oxygen, liquid, at plant- RNA market for argon, liquid   argon, liquid   Cutoff, U - RoW	USLCI	2012
<b>Electricity/Heat</b>			
Electricity	electricity voltage transformation from high to medium voltage   electricity, medium voltage   Cutoff, U - CA-ON	Ecoinvent 3.7.1	2020
Natural gas	market for heat, central or small-scale, natural gas   heat, central or small-scale, natural gas   Cutoff, U - RoW	Ecoinvent 3.7.1	2020
<b>Transportation</b>			
Rail	transport, freight train, diesel   transport, freight train   Cutoff, U - US	Ecoinvent 3.7.1	2020
Truck	transport, freight, lorry 16-32 metric ton, EURO4   transport, freight, lorry 16-32 metric ton, EURO4   Cutoff, U - RoW	Ecoinvent 3.7.1	2020

### 3.8 DATA QUALITY

The data quality assessment addressed the following parameters: time-related coverage, geographical coverage, technological coverage, precision, completeness, representativeness, consistency, reproducibility, sources of data, and uncertainty.



**Table 4.** Data quality assessment for the Gerdau rebar product system.

Data Quality Parameter	Data Quality Discussion
<b>Time-Related Coverage:</b> Age of data and the minimum length of time over which data is collected	For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations.
<b>Geographical Coverage:</b> Geographical area from which data for unit processes is collected to satisfy the goal of the study	Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results.
<b>Technology Coverage:</b> Specific technology or technology mix	The LCA model included all known mass and energy flows for production of rebar. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded.
<b>Precision:</b> Measure of the variability of the data values for each data expressed	Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction.
<b>Completeness:</b> Percentage of flow that is measured or estimated	The consistency of the assessment is considered to be high. Data sources of similar quality and age are used with a bias towards Ecoinvent v3.7.1 data where available. Different portions of the product life cycle are equally considered; however, it must be noted that final disposition of the product is based on assumptions of current average practices in Europe and the United States.
<b>Representativeness:</b> Qualitative assessment of the degree to which the data set reflects the true population of interest	Based on the description of data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented.
<b>Consistency:</b> Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis	Data from the Gerdau manufacturing facilities represent an annual average and are considered of high quality due to the length of time over which these data are collected, as compared to a snapshot that may not accurately reflect fluctuations in production. The Ecoinvent database is used for secondary LCI datasets.
<b>Reproducibility:</b> Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study	Uncertainty related to materials in the rebar is moderate. Specifically, some alloys were not available in the secondary datasets and were modeled with proxy datasets. Actual supplier data for upstream operations was not available for steel suppliers or fabrication, and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years) but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment method required by the PCR includes impact potentials, which lack characterization of providing and receiving environments or tipping points.
<b>Sources of the Data:</b> Description of all primary and secondary data sources	For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations.
<b>Uncertainty of the Information:</b> Uncertainty related to data, models, and assumptions	Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results.

### 3.9 PERIOD UNDER REVIEW

The period of review is January 01, 2020 through December 31, 2020.

### 3.10 ALLOCATION

With respect to the steel scrap, the 100-0 recycled content approach is used in which the recycled material bears only the burden of any processing from waste material.

Mass allocation was deemed the most accurate and reproducible way of calculating the energy and material requirements for the manufacture of rebar and co-products. Primary data for resource use (e.g., electricity, natural gas, water), waste/co-products, and emissions released, are allocated on a mass-basis as a fraction of total annual production of rebar and the co-products, including EAF slag, millscale and baghouse dust.

The transportation from primary producer of material components (e.g., alloys, fluxes) to steel mill is based on primary data provided by Gerdau, including modes, distances, and amount of steel transported from each supplier to the Gerdau. Transportation was allocated on the basis of the mass and distance the material was transported.

### 3.11 COMPARABILITY

The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

## 4. LCA: Scenarios and Additional Technical Information

### Manufacturing

Electric arc furnace (EAF) steelmaking and rolling occurs at the Whitby, ON facility. Electricity is modeled using ecoinvent v3.7.1 dataset for the Ontario, Canada electricity supply mix, the province in which the facility is located. The Whitby steel mill produces oxygen and operates a shredder on-site. The Whitby mill operates two rolling mills: a bar mill and a structural steel mill.

Transportation of waste materials at manufacturing assumes a 20 mile (~32 km) average distance to disposal, where unknown, consistent with assumptions used in the US EPA WARM model. Assumed disposal rates for nonhazardous wastes are based on US EPA SMM rates of 20% incineration and 80% landfilled. The overall majority of hazardous waste at Gerdau facilities are recycled with only a small amount going to landfills. Recycling of EAF dust is discussed in section 3.5 and based on actual modes of transport and distances, provided by the manufacturer.



## 5. LCA: Results

Results of the Life Cycle Assessment are calculated using Life Cycle Impact Assessment (LCIA) methods. Two LCIA methods are reported in this EPD:

- 1) TRACI (Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts), developed by the U.S. EPA with a primarily North American focus; and
- 2) CML-IA, developed at Leiden University in The Netherlands.

The following environmental impact category indicators are reported using characterization factors based on the TRACI 2.1 and CML-IA impact assessment methods. It is noted that LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

CML-IA Impact Category	Unit	TRACI 2.1 Impact Category	Unit
Global Warming Potential (GWP)	kg CO <sub>2</sub> eq	Global Warming Potential (GWP)	kg CO <sub>2</sub> eq
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11 eq	Ozone Depletion Potential (ODP)	kg CFC 11 eq
Acidification Potential of soil and water (AP)	kg SO <sub>2</sub> eq	Acidification Potential (AP)	kg SO <sub>2</sub> eq
Eutrophication Potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> eq	Eutrophication Potential (EP)	kg N eq
Photochemical Oxidant Creation Potential (POCP)	kg C <sub>2</sub> H <sub>4</sub> eq	Smog Formation Potential (SFP)	kg O <sub>3</sub> eq
Abiotic depletion potential (ADP-elements) for non-fossil resources	kg Sb eq	Fossil Fuel Depletion Potential (FFD)	MJ Surplus, LHV
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	MJ, LHV	-	-

These impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes.

The following inventory parameters, specified by the PCR, are also reported.

Resources	Unit	Waste and Outflows	Unit
RPR <sub>E</sub> : Renewable primary resources used as energy carrier (fuel)	MJ, LHV	HWD: Hazardous waste disposed	kg
RPR <sub>M</sub> : Renewable primary resources with energy content used as material	MJ, LHV	NHWD: Non-hazardous waste disposed	kg
NRPR <sub>E</sub> : Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	HLRW: High-level radioactive waste, conditioned, to final repository	kg
NRPR <sub>M</sub> : Non-renewable primary resources with energy content used as material	MJ, LHV	ILLRW: Intermediate- and low-level radioactive waste, conditioned, to final repository	kg
SM: Secondary materials	MJ, LHV	CRU: Components for re-use	kg
RSF: Renewable secondary fuels	MJ, LHV	MR: Materials for recycling	kg
NRSF: Non-renewable secondary fuels	MJ, LHV	MER: Materials for energy recovery	kg
RE: Recovered energy	MJ, LHV	EE: Recovered energy exported from the product system	MJ, LHV
FW: Use of net freshwater resources	m <sup>3</sup>	-	-

**Table 5.** Life Cycle Impact Assessment (LCIA) results for Gerdau reinforcing bar. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Impact Category	Life cycle stage			
	A1	A2	A3	Total (A1-A3)
<b>CML-IA</b>				
GWP (kg CO <sub>2</sub> eq)	642	80.9	51.3	775
	83%	10.4%	6.63%	100%
AP (kg SO <sub>2</sub> eq)	1.48	0.378	0.208	2.07
	72%	18.2%	10.06%	100%
EP (kg (PO <sub>4</sub> ) <sup>3-</sup> eq)	0.446	0.0922	0.283	0.821
	54%	11.2%	34.43%	100%
POCP (kg C <sub>2</sub> H <sub>4</sub> eq)	0.089	0.0118	0.00804	0.109
	82%	10.8%	7.36%	100%
ODP (kg CFC-11 eq)	6.04x10 <sup>-5</sup>	1.36x10 <sup>-5</sup>	9.78x10 <sup>-7</sup>	7.49x10 <sup>-5</sup>
	81%	18.1%	1.30%	100%
ADPE (kg Sb eq)	1.76x10 <sup>-5</sup>	8.71x10 <sup>-7</sup>	3.90x10 <sup>-7</sup>	1.89x10 <sup>-5</sup>
	93%	4.62%	2.07%	100%
ADPF (MJ)	6,830	1,160	516	8,510
	80%	13.7%	6.07%	100%
<b>TRACI 2.1</b>				
GWP (kg CO <sub>2</sub> eq)	637	80.7	51.1	769
	83%	10.5%	6.65%	100%
AP (kg SO <sub>2</sub> eq)	1.83	0.456	0.200	2.48
	74%	18.4%	8.0%	100%
EP (kg N eq)	0.781	0.100	0.655	1.54
	51%	6.5%	42.6%	100%
SFP (kg O <sub>3</sub> eq)	28.0	12.0	1.77	41.7
	67%	28.7%	4.2%	100%
ODP (kg CFC-11 eq)	7.75x10 <sup>-5</sup>	1.81x10 <sup>-5</sup>	1.41x10 <sup>-6</sup>	9.70x10 <sup>-5</sup>
	80%	18.6%	1.4%	100%
FFD (MJ eq)	936	164	19.2	1,120
	84%	14.7%	1.7%	100%

Neg = negligible

INA=Indicator not assessed.

Comparisons cannot be made between product-specific or industry average EPDs at the design stage of a project, before a building has been specified. Comparisons may be made between product-specific or industry average EPDs at the time of product purchase when product performance and specifications have been established and serve as a functional unit for comparison. Environmental impact results shall be converted to a functional unit basis before any comparison is attempted.

Any comparison of EPDs shall be subject to the requirements of ISO 21930. EPDs are not comparative assertions and are either not comparable or have limited comparability when they have different system boundaries, are based on different product category rules or are missing relevant environmental impacts. Such comparison can be inaccurate and could lead to erroneous selection of materials or products which are higher-impact, at least in some impact categories.

**Table 6.** Resource use and waste flows for Gerdau reinforcing bar. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

Parameter	Life cycle stage			
	A1	A2	A3	Total (A1-A3)
<b>Resources</b>				
RPR <sub>E</sub> (MJ)	1,060	16.2	93.5	1,160
	91%	1.39%	8.03%	100%
RPR <sub>M</sub> (MJ)	INA	INA	INA	INA
	n/a	n/a	n/a	n/a
NRPR <sub>E</sub> (MJ)	9,730	1,110	605	11,400
NRPR <sub>M</sub> (MJ)	INA	INA	INA	INA
SM (MT)	1.53	0.00	0.00	1.53
	100%	0.0%	0.0%	100%
RSF/NRSF (MJ)	Neg.	Neg.	Neg.	Neg.
RE (MJ)	0.00	0.00	0.00	0.00
FW (m <sup>3</sup> )	64.6	0.479	0.0426	65.1
	99%	0.735%	0.0654%	100%
<b>Wastes</b>				
HWD (kg)	9.57x10 <sup>-3</sup>	3.10x10 <sup>-3</sup>	1.51x10 <sup>-4</sup>	0.0128
	75%	24.2%	1.17%	100%
NHWD (kg)	483	48.0	2.10	534
	91%	9.00%	0.394%	100%
HLRW (kg)	0.112	7.49x10 <sup>-5</sup>	3.06x10 <sup>-4</sup>	0.112
	100%	0.0668%	0.273%	100%
ILLRW (kg)	0.0591	7.62x10 <sup>-3</sup>	1.57x10 <sup>-3</sup>	0.0683
	87%	11.1%	2.30%	100%
CRU (kg)	Neg.	Neg.	Neg.	Neg.
MR (kg)	0.342	0.00	0.00	0.342
	100%	0.0%	0.0%	100%
MER (kg)	Neg.	Neg.	Neg.	Neg.
EE (MJ)	Neg.	Neg.	Neg.	Neg.

Neg = negligible

INA=Indicator not assessed

The PCR requires the calculation of carbon emissions and removals, all of which are negligible due to the fact that no biogenic carbon is included in the product and any packaging is negligible.

## 6. LCA: Interpretation

The contributions to total impact indicator results are dominated by the product manufacturing phase (A1), followed by the transportation stage (A2) for all indicators, except eutrophication potential in which the second greatest life cycle stage is fabrication.

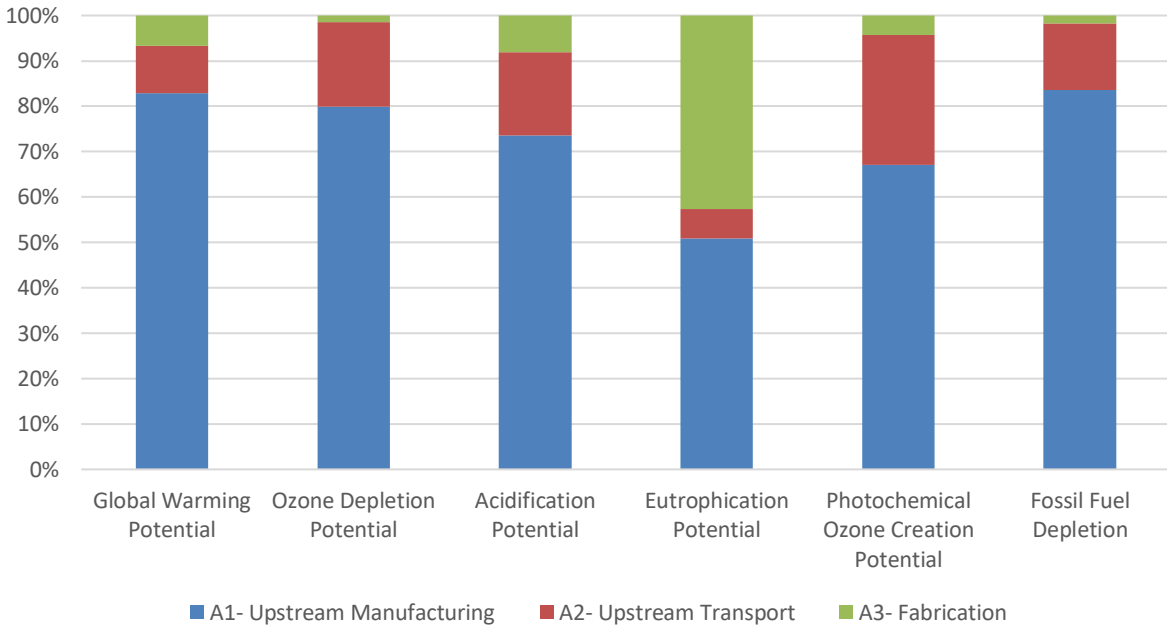


Figure 2. Contribution analysis for the Gerdau reinforcing bar



## 7. References

1. Life Cycle Assessment of Gerdau reinforcing bar. SCS Global Services Report. Prepared for Gerdau North America. August 2021.
2. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
3. ISO 14040: 2006/Amd 1:2020 Environmental Management – Life cycle assessment – Principles and Framework
4. ISO 14044: 2006/Amd 1:2017/Amd 2:2020 Environmental Management – Life cycle assessment – Requirements and Guidelines.
5. ISO 21930: 2017 Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services.
6. PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 3.2. UL Environment. Sept. 2018
7. SCS Type III Environmental Declaration Program: Program Operator Manual. V10.1 May 2021. SCS Global Services.
8. Narita et al (1999). Life Cycle Inventory Analysis of the Recycling of Electric Arc Furnace Dust to the Zinc Metal. *Shigen-to-Sozai* 116(8):674-681
9. Bare, J. C. Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI), Version 2.1 - User's Manual; EPA/600/R-12/554 2012. <https://www.epa.gov/chemical-research/tool-reduction-and-assessment-chemicals-and-other-environmental-impacts-traci>
10. CML-IA Characterization Factors. Leiden University, Institute of Environmental Sciences. April 2013. <http://cml.leiden.edu/software/data-cmlia.html>
11. Ecoinvent Centre (2020) ecoinvent data from v3.7.1 Swiss Center for Life Cycle Inventories, Dübendorf, 2020, <http://www.ecoinvent.org>
12. European Joint Research Commission. International Reference Life Cycle Data System handbook. *General guide for Life Cycle Assessment – Detailed Guidance*. © European Union, 2010.
13. "WARM Model Transportation Research – Draft." Memorandum from ICF Consulting to United States Environmental Protection Agency. September 7, 2004. <http://epa.gov/epawaste/conserve/tools/warm/SWMGHGreport.html#background>.



For more information, contact:

**Gerdau Long Steel North America**

4221 West Boy Scout Blvd.

Tampa, FL 33607

[www.gerdau.com](http://www.gerdau.com) | [GLNinfo@gerdau.com](mailto:GLNinfo@gerdau.com) | 1-800-637-8144

**Whitby Steel Mill**

1 Gerdau Court, Whitby, ON L1N 5T1, Canada



**SCS Global Services**

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA

Main +1.510.452.8000 | fax +1.510.452.8001